

纯上光吊灯

Indirect only Lamps

## 纯上光吊灯 Indirect only Lamps



601-1.Z  
133-134




713-2.Z  
135-136



712.Z  
137-138

# 601-1.Z Series



壁装配置  
Wall mounted kits



宽光束上光设计  
Wide beam angle indirect light




## 材质与工艺 Material & technology

名称	SD72-仅上光
型号	601-1.Z
电压配置可选	恒流/24V恒压方案可选
灯体材料	优质阳极氧化铝 (6063合金)
表面处理	哑白色/哑黑色
控光面罩	宽光束角光学设计有效提高灯具高效性和均匀度
光源	LED-SMD模块高光效输出
照明方式	上发光
显色指数	≥80/≥90/≥95
色温	3000K/3500K/4000K/5000K/6000K
驱动电源	高性能高转换率驱动, 锐高/飞利浦等品牌
控制方式	ON/OFF,0-10V调光, DALI调光, DALI调光调色, 遥控, 蓝牙等
电气等级	I
IP	20

Name	SD72-Indirect light only
Model	Model: 601-1.Z
Voltage configuration optional	Constant current/24V constant voltage
Body Material	Aluminum alloy(6063)
Body Finish	Matte White / Matte Black
Diffuser	up light adopts the wide beam angle to improve the high efficiency and uniformity of the lamp
Light source	High luminous efficiency LED-SMD module
Light distribution	Indirect light
Color rendering	≥80/≥90/≥95
CCT	3000K/3500K/4000K/5000K/6000K
Driver	High efficiency driver,using brands such as Tridonic/Philips
Control Way	ON/OFF,0-10V dim, DALI dim, DALI tunable white, Remote control, blueooth.
Electrical grade	I
IP	20

## 可选控制方式 Optional control mode



开关控制  
Switch control



遥控控制  
Remote control



手机蓝牙控制  
Bluetooth or Zigbee






Dali调光控制  
DALI-DT6 dim



Dali调光调色控制  
DALI-DT8 CCT tunable & dim





0-10v控制  
0-10v dim

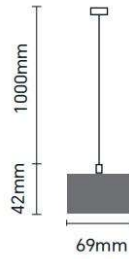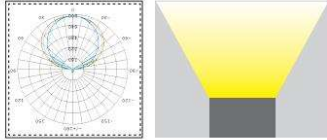

S-吊装  
S-suspended

灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
596*69*42	601-1SD.HPP604Z/	L 10W	1000Lm	Wide beam angle
		M 14W	1400Lm	
		H 19W	1900Lm	
886*69*42	601-1SD.HPP904Z/	L 15W	1500Lm	Wide beam angle
		M 21W	2100Lm	
1176*69*42	601-1SD.HPP1204Z/	L 20W	2000Lm	Wide beam angle
		M 28W	2800Lm	
1466*69*42	601-1SD.HPP1504Z/	L 25W	2500Lm	Wide beam angle
		M 35W	3500Lm	
		H 47W	4700Lm	
1756*69*42	601-1SD.HPP1804Z/	L 30W	3000Lm	Wide beam angle
		M 42W	4200Lm	
		H 57W	5700Lm	
2336*69*42	601-1SD.HPP2404Z/	L 40W	4000Lm	Wide beam angle
		M 56W	5600Lm	
		H 76W	7600Lm	

产品可选安装示意图 Optional installation way

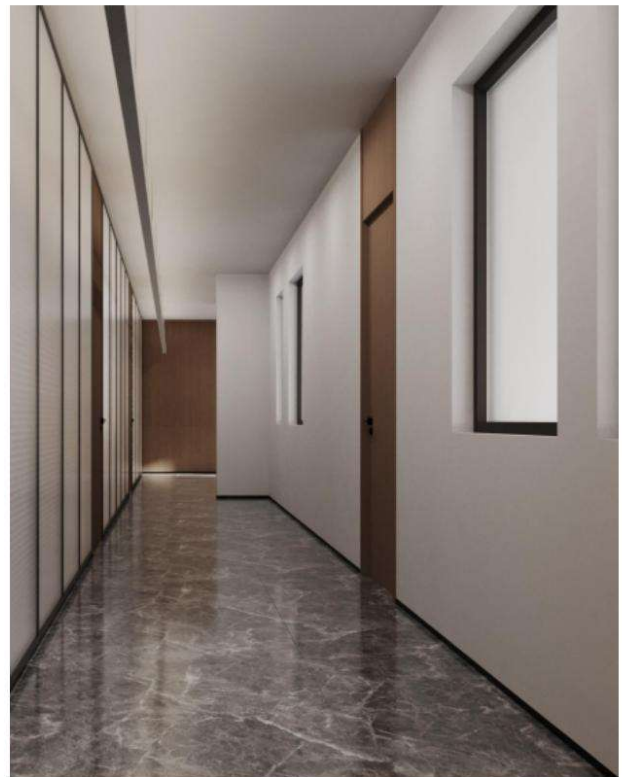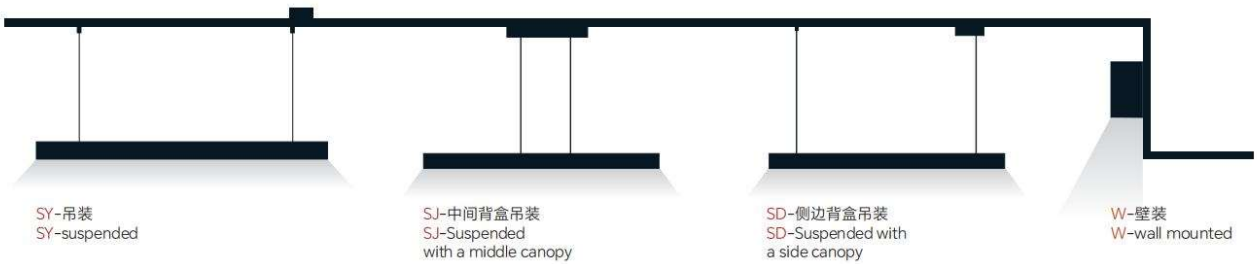


产品色温可选 Optional color temperature

LED 3000K | 3500K | 4000K | 5000K | 6000K

LED 3000K - 6000K Tunable 可调节色温

# 713-2.Z Series



壁装配置  
Wall mounted kits



宽光束上光设计  
Wide beam angle indirect light



## 材质与工艺 Material & technology

名称	SD73-仅上光
型号	713-2.Z
电压配置可选	恒流/24V恒压方案可选
灯体材料	优质阳极氧化铝 (6063合金)
表面处理	哑白色/哑黑色
控光面罩	宽光束角光学设计有效提高灯具高效性和均匀度
光源	LED-SMD模块高光效输出
照明方式	上发光
显色指数	≥80/≥90/≥95
色温	3000K/3500K/4000K/5000K/6000K
驱动电源	高性能高转换率驱动, 锐高/飞利浦等品牌
控制方式	ON/OFF,0-10V调光, DALI调光, DALI调光调色, 遥控, 蓝牙等
电气等级	I
IP	20

Name	SD73-Indirect light only
Model	713-2.Z
Voltage configuration optional	Constant current/24V constant voltage
Body Material	Aluminum alloy(6063)
Body Finish	Matte White / Matte Black
Diffuser	up light adopts the wide beam angle to improve the high efficiency and uniformity of the lamp
Light source	High luminous efficiency LED-SMD module
Light distribution	Indirect light
Color rendering	≥80/≥90/≥95
CCT	3000K/3500K/4000K/5000K/6000K
Driver	High efficiency driver,using brands such as Tridonic/Philips
Control Way	ON/OFF,0-10V dim, DALI dim, DALI tunable white, Remote control, blueooth.
Electrical grade	I
IP	20

## 可选控制方式 Optional control mode



开关控制  
Switch control



遥控控制  
Remote control



手机蓝牙控制  
Bluetooth or Zigbee






Dali调光控制  
DALI-DT6 dim



Dali调光调色控制  
DALI-DT8 CCT tunable & dim




0-10v控制  
0-10v dim

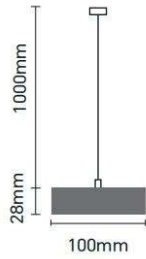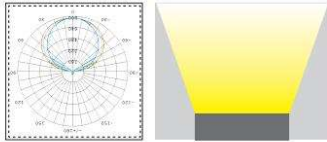

S-吊装  
S-suspended

灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
596*100*28	713-2SD.A214E/	L 20W	2000Lm	Wide beam angle
	M 28W	2800Lm		
	H 38W	3800Lm		
886*100*28	713-2SD.A221E/	L 30W	3000Lm	Wide beam angle
	M 42W	4200Lm		
	H 56W	5600Lm		
1176*100*28	713-2SD.A228E/	L 40W	4000Lm	Wide beam angle
	M 56W	5600Lm		
	H 76W	7600Lm		
1466*100*28	713-2SD.A235E/	L 50W	5000Lm	Wide beam angle
	M 70W	7000Lm		
	H 94W	9400Lm		
1756*100*28	713-2SD.A242E/	L 60W	6000Lm	Wide beam angle
	M 84W	8400Lm		
	H 114W	11400Lm		
2336*100*28	713-2SD.A256E/	L 80W	8000Lm	Wide beam angle
	M 112W	11200Lm		
	H 152W	15200Lm		

产品可选安装示意图 Optional installation way


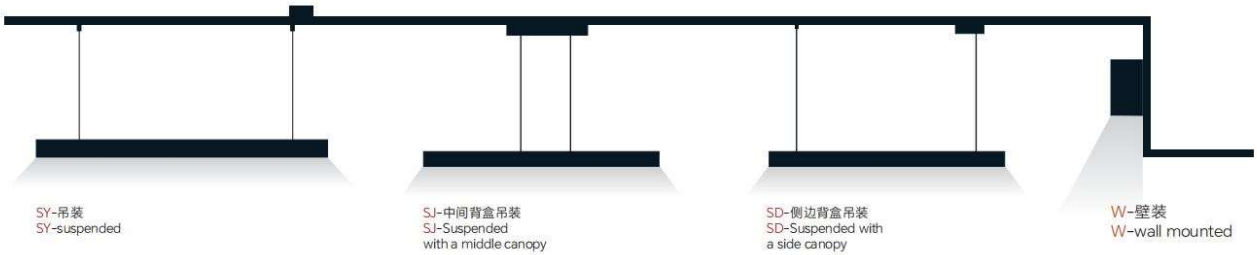


产品色温可选 Optional color temperature

LED 3000K | 3500K | 4000K | 5000K | 6000K

LED 3000K - 6000K Tunable 可调节色温

# 712.Z Series

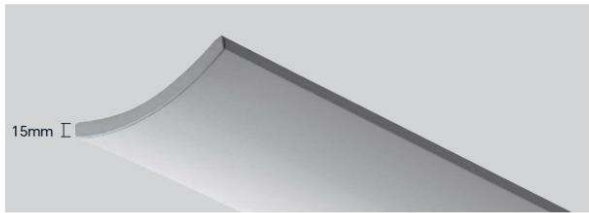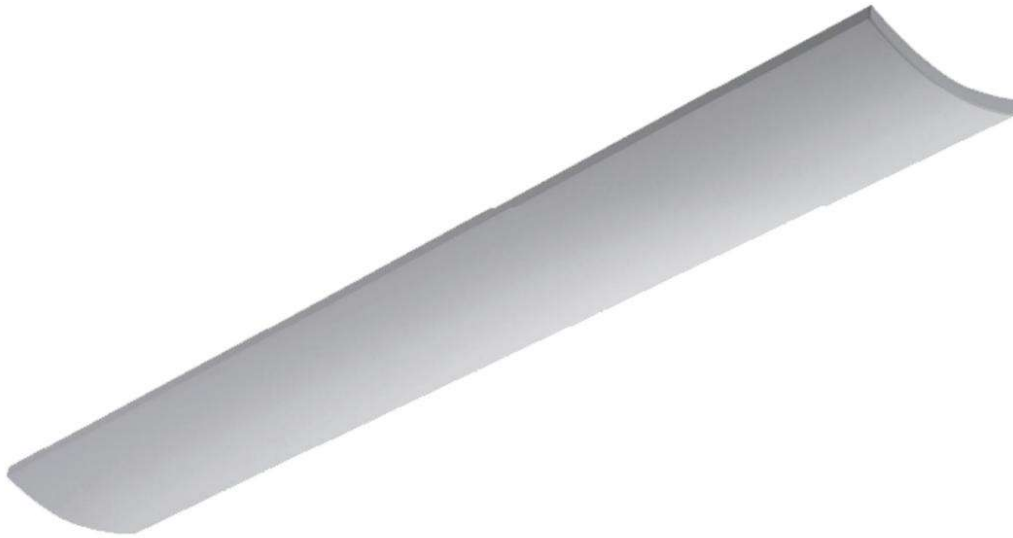

超薄曲面造型&宽光束上光设计  
Ultra thin curved design & Wide beam angle indirect light



## 材质与工艺 Material & technology

名称	SD75-仅上光
型号	712.Z
电压配置可选	恒流/24V恒压方案可选
灯体材料	优质阳极氧化铝(6063合金)
表面处理	哑白色/哑黑色
控光面罩	宽光束角光学设计有效提高灯具高效性和均匀度
光源	LED-SMD模块高光效输出
照明方式	上发光
显色指数	≥80/≥90/≥95
色温	3000K/3500K/4000K/5000K/6000K
驱动电源	高性能高转换率驱动, 锐高/飞利浦等品牌
控制方式	ON/OFF,0-10V调光, DALI调光, DALI调光调色, 遥控, 蓝牙等
电气等级	I
IP	20

Name	SD75-Indirect light only
Model	712.Z
Voltage configuration optional	Constant current/24V constant voltage
Body Material	Aluminum alloy(6063)
Body Finish	Matte White / Matte Black
Diffuser	up light adopts the wide beam angle to improve the high efficiency and uniformity of the lamp
Light source	High luminous efficiency LED-SMD module
Light distribution	Indirect light
Color rendering	≥80/≥90/≥95
CCT	3000K/3500K/4000K/5000K/6000K
Driver	High efficiency driver,using brands such as Tridonic/Philips
Control Way	ON/OFF,0-10V dim, DALI dim, DALI tunable white, Remote control, blueooth.
Electrical grade	I
IP	20

## 可选控制方式 Optional control mode



开关控制  
Switch control



遥控控制  
Remote control



手机蓝牙控制  
Bluetooth or Zigbee




Dali调光控制  
DALI-DT6 dim



Dali调光调色控制  
DALI-DT8 CCT tunable & dim





0-10V控制  
0-10v dim

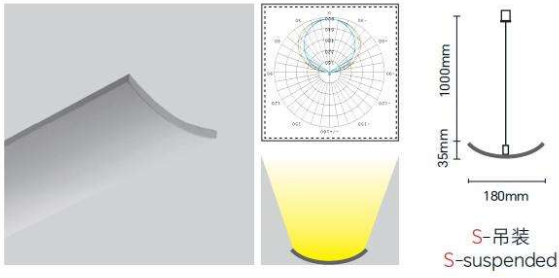

灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
1370*180*35	712S.A228Z/	L 40W	4000Lm	Wide beam angle
		M 56W	5600Lm	
	712S.2A238Z/	H 76W	7600Lm	
1660*180*35	712S.A235Z/	L 50W	5000Lm	Wide beam angle
		M 70W	7000Lm	
	712S.2A247Z/	H 94W	9400Lm	
1950*180*35	712S.A242Z/	L 60W	6000Lm	Wide beam angle
		M 84W	8400Lm	
	712S.2A257Z/	H 114W	11400Lm	
2432*180*35	712S.A253Z/	L 76W	7600Lm	Wide beam angle
		M 106W	10600Lm	
	712S.2A273Z/	H 146W	14600Lm	

产品可选安装示意图 Optional installation way

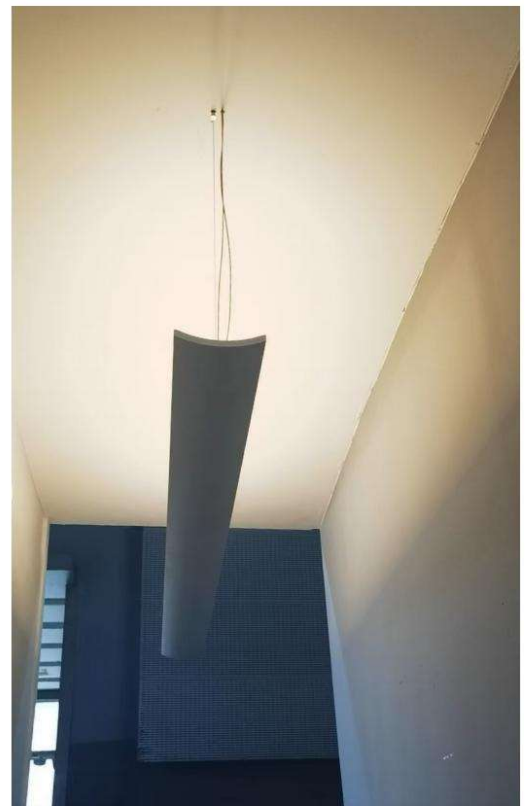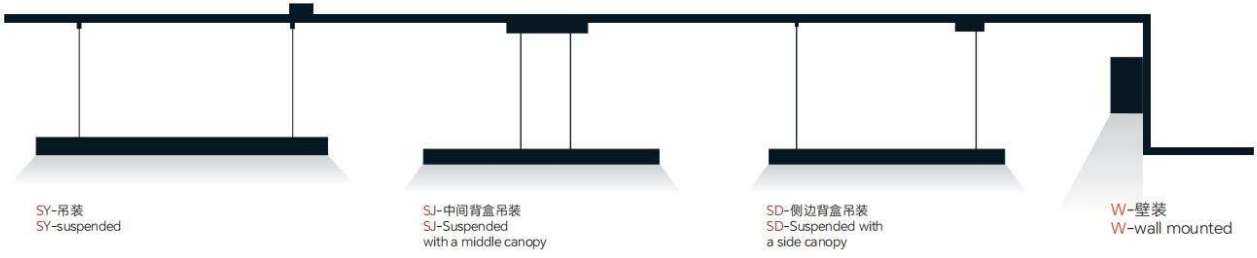

产品色温可选 Optional color temperature

LED 3000K | 3500K | 4000K | 5000K | 6000K

LED 3000K - 6000K Tunable 可调节色温



®  
**雄宇办公照明**  
**XIONGYU** **XLinear**®  
OFFICE LIGHTING

**浙江摩灯照明科技有限公司**  
ZHEJIANG MODENG LIGHTING TECHNOLOGY CO.,LTD

地址:浙江省温州市瓯海区瞿溪街道东化路66号  
电话:86-577-88760099 / 89768558 / 88767668

Add:No.66 DonghuaRoad,Quxi street, OuhaiDistrict,  
Wenzhou City,Zhejiang Province  
Tel:86-577-88760099 / 89768558 / 88767668  
[www.chinaxiongyu.com](http://www.chinaxiongyu.com)  
[www.xlinear.cn](http://www.xlinear.cn)  
[export1@chinaxiongyu.com](mailto:export1@chinaxiongyu.com)  
[jane@xlinear.cn](mailto:jane@xlinear.cn) [coco@xlinear.cn](mailto:coco@xlinear.cn)

所有数据来源于浙江摩灯照明，如有任何印刷错误或翻译误差，敬请广大用户谅解。产品设计与规格如有更改，请以实际产品为准，恕不另行通知。部分产品已申请专利，仿冒必究！

如有疑问，敬请垂询我公司的销售代表或客户服务代表，或访问我公司网站以获取更多信息。

All technical data are from Modeng Lighting. If there are any typographical errors or translation inaccuracies, we hope for your kind understanding. Any changes in product design or technical specifications will follow the actual products and may occur without prior notice. Some products are patent-protected, and infringement will be prosecuted. Should you have any further questions, please feel free to contact our sales representatives or customer service representatives, or visit our website for more information.



了解更多详情  
请扫描官网二维码

